


SUPPORTS FOR TIMBER DECKING

WALLBARN ALSO PRODUCES A FLAT HEADED SUPPORT
PAD SPECIFICALLY DESIGNED FOR TIMBER DECKING

We manufacture a smooth headed support pad which will hold timber joists rather than paving slabs.

Timber decking can be laid onto roofs built to falls or with irregular levels, to produce a flat area using the adjustable stems.

The heights and weight tolerances are the same as for the lugged supports detailed earlier.

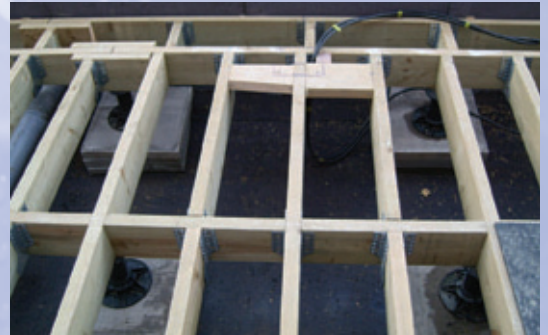

Contractors will lay the joist frame onto the flat heads at around 600mm centres. The timber can be spot bonded, fixed with a wood screw or simply be freestanding; so long as the edges are secured. By this method none of the timber is left in standing water, reducing any chance of rotting.

The top decking is secured to the batons, producing a clean, natural finish. All rainwater can then run between the gaps in the decking and out into the drainage outlets constructed beneath the system.

