



Roofing

product catalogue

Marley Eternit's extensive range of tiles, slates, dry fix products, ventilation systems and accessories has been successfully enhancing and protecting our roofs for over 100 years.

We want to make your project as straightforward and successful as possible, so we're on hand to offer practical, experienced support in a range of useful ways.

This can be delivering urgent samples where and when they're needed, providing products that help you achieve an A+ rating and gain credits for your buildings, supplying bespoke fixing specifications, offering complete dry fixed ventilation solutions and much more.

In short, we're here to support you in any way we can and we're always happy to take some of the load off your shoulders.

Let ME lighten your load

Trust Marley Eternit to take the hassle out of roofing. If you ever need advice on any roofing related issue, you can rely on our team to give you a helping hand.

Call **ME** 01283 722588
 Email info@marleyeternit.co.uk
 Or visit www.marleyeternit.co.uk



All factories certified to ISO 9001, ISO 14001, OHSAS 18001



Contents

- 2 Introduction
- 4 Minimum banded quantities
- 5 Resources
- 6 BS 5534 solutions
- 8 Product selector
- 10 Clay plain tiles and fittings
- 19 Clay interlocking tiles and fittings
- 25 Fibre cement slates and fittings
- 33 Concrete plain tiles and fittings
- 36 Concrete interlocking tiles and fittings
- 51 Fixings
- 54 Dry fix and ventilation
- 63 Complementary products

Minimum banded quantities

	No. per band	Bands per pallet	Quantity per pallet
Fibre cement slates			
600 x 300mm slates	15	72	1080
600 x 600mm doubles	10	30	300
Thrutone 500 x 250mm	20	70	1400
Thrutone 500 x 250mm doubles	10	32	320
Thrutone 600 x 300mm Zinc Grey / Graphite	12	90	1080
Garsdale 600 x 300mm	15	60	900
Garsdale 600 x 600mm	n/a	n/a	300
Concrete tiles			
Plain tiles	10	90	900
Plain eaves/top	10	120	1200
Plain tile and half	10	54	540
Anglia	38	12	456
Ashmore	6	46	276
Double Roman, Mendip & Wessex	32	6	192
Edgemere Range	40	6	240
Ludlow Major	36	6	216
Ludlow Plus	43	12	516
Modern and Duo Modern	32	6	192
Concrete fittings			
Segmental ridge tiles	5	24	120
Modern ridge tiles	5	28	140
Clay plain tiles			
Canterbury handmade tiles	n/a	n/a	860
Canterbury handmade eaves	n/a	n/a	860
Canterbury handmade gables	n/a	n/a	560
Ashdowne tiles	11	105	1155
Ashdowne eaves	15	100	1500
Ashdowne tile and a half	12	63	756
Acme/Hawkins tiles	12	105	1260
Acme/Hawkins eaves	15	100	1500
Acme/Hawkins tile and a half	12	63	756
Creasing tiles*	12	105	1260
Clay interlocking tiles			
Lincoln tiles	4	88	352
Lincoln LH verge tiles	4	88	352
Maxima tiles*	4	60	240
Maxima LH verge tiles	4	20	80
Melodie tiles*	6	40	240
Melodie LH verge tiles	6	20	120

* Available as full pallets only

Resources



Technical advice

Our Technical Advisory Service is staffed by a qualified team with specialist knowledge.

Call 01283 722588 or e-mail info@marleyeternit.co.uk



Fixing instructions and literature

Comprehensive sitework, fixing and installation literature and videos:

marleyeternit.co.uk/resources

All current product and technical literature can be downloaded:
marleyeternit.co.uk/downloads



Samples

Samples of clay interlocking and plain tiles, fibre cement slates and concrete tiles are available on request.

Tel 01283 722588

marleyeternit.co.uk/samples



Stockist information

To find details for stockists of Marley Eternit products, visit:

marleyeternit.co.uk/stockists



Customer services

Knowledgeable and friendly staff are available to offer quotations, expert advice, deal with orders and all other enquiries.

Call 08705 626400 or

e-mail info@marleyeternit.co.uk



Sales support

Our Area Sales Managers have in-depth knowledge of your local area. They are available to visit your site to carry out a roof survey, and to offer specific solutions for both new build and refurbishment projects.

marleyeternit.co.uk/localcontacts



Tilefix

Create instant fixing specifications based on the geographical location and building dimensions of specific building projects.

marleyeternit.co.uk/tilefix



Estimator

A tool designed to create a complete bill of materials for your roofing project, based on a wide range of roof shapes:

marleyeternit.co.uk/estimator



Training centre

We have a purpose-built training centre where we are able to impart our expertise through a range of practical and classroom courses. To find out more about our courses, visit:

marleyeternit.co.uk/training



Health and Safety

In line with the requirements of the Health and Safety at Work Act, The Consumer Protection Act and The Chemicals (Hazard Information and Packaging for Supply) Regulations and the Control of Substances Hazardous to Health Regulations, **please download and view copies of our COSHH data sheets**

at marleyeternit.co.uk/coshh

BS 5534 solutions

BS 5534 is the British Standard for Slating and Tiling and provides the industry with guidance on best practice relating to the installation of roofs.

Contained within it is a vast array of information, ranging from batten selection, to the methods of fixing, through to wind uplift formulas which provide manufacturers like us with a means of calculating fixing specifications.

BS 5534 key factors

With extreme weather events such as gale force winds, driving rain and flooding on the rise and placing more strain on the UK roofscape than ever before, the standard was radically improved in 2014.

Critically, the changes now require mechanical fixing of all components, even if mortar bedded, and increased levels of tile fixings, especially clipping.

Updates to the British Standard for Slating and Tiling ultimately ensure that the UK is more closely aligned with the standards and practices outlined in the equivalent Eurocodes, as well as ensuring the best possible practice is followed to deliver durable, low maintenance roofs.



A greater proportion of tiles must be clipped

SoloFix – the one-piece clip and nail

Marley Eternit has launched SoloFix, a one-piece clip and nail for all standard interlocking tiles, providing an affordable fixing that not only installs up to 30% faster than traditional clips, but delivers outstanding strength and durability.



To see how SoloFix performs against traditional clips, watch our roof installation race at marleyeternit.co.uk/solofix or scan the QR code below.



Mortar can no longer be used as the only means of fixing

Mortar bedded security kits

Where mortar bedding is required, Marley Eternit offers mortar bedded security ridge and hip kits. These provide installers with mechanical fixings to secure ridge and hip units directly to the timber framework of the roof.

Marley Eternit head clip and tail clip packs provide an effective solution for mechanically fixing small tile cuts at both the hip and valley.

To view a short installation video on both of our mortar bedded security kits, please visit marleyeternit.co.uk/securityridge or marleyeternit.co.uk/securityhip or scan the QR codes below.



Our new sitework guide app is your pocket expert on installing a roof system to British Standards

Search by construction or product to find the right BS 5534 and BS 5250 compliant system.

Provides comprehensive, easy to understand step-by-step fixing instructions.






To find out more, visit: marleyeternit.co.uk/pocketexpert

Download from the App Store, Google Play or Amazon by searching for Marley Eternit



Product selector

Clay plain tiles

					
	Canterbury	Ashdowne	Hawkins	Acme double camber	Acme single camber
Features	Handmade Single camber	Handcrafted Single camber	Machine-made Single camber	Machine-made Double camber	Machine-made Single camber
Size	265 x 165mm	265 x 165mm	265 x 165mm	265 x 165mm	265 x 165mm
Minimum pitch	40°	35°	30°	35°	30°
Maximum pitch	90°	90°	90°	90°	90°
No. of colours	3	2	5	6	8
Page	11	12	13	14	15

Clay interlocking tiles

			
	Lincoln	Maxima	Melodie
Features	Clay pantile Open gauge	Clay Double Roman Open gauge	Clay pantile Flexible gauge
Size	370 x 247mm	403 x 333mm	440 x 255mm
Minimum pitch	17.5°	17.5°	12.5°
Maximum pitch	70°	70°	70°
No. of colours	2	1	1
Page	20	22	23






Concrete plain tiles

	
	Plain
Features	Cross camber
Size	267 x 168mm
Minimum pitch	35°
Maximum pitch	90°
No. of colours	9
Page	34

Other products






	Profile 6 profiled sheeting	Farmscape profiled sheeting	Profile 3 profiled sheeting	Cedral Lap	Cedral Click
Features	High strength sheet ideal for large projects	High strength sheet Ideal for large projects	Smaller sheet ideal for smaller projects	Aesthetic plank for exterior cladding	Tongue and groove cladding plank
Size	Various	Various	Various	190 x 3600mm	190 x 3600mm
Minimum pitch	5°	5°	10°	n/a	n/a
Page	66	66	66	68	70


Fibre cement slates

					
	Rivendale	Garsdale	Birkdale	Thrutone	Vertigo
Features	Riven surface Dressed edges	Textured surface Square edges	Smooth surface Dressed edges	Smooth surface Square edges	Fibre cement slate Vertical applications
Size	600 x 300mm	600 x 300mm	600 x 300mm	600 x 300mm 500 x 250mm	600 x 300mm
Minimum pitch	20° (moderate exposure) 22.5° (severe exposure)	20° (moderate exposure) 22.5° (severe exposure)	15° (moderate exposure)* 17.5° (severe exposure)*	15° (moderate exposure)** 22.5° (severe exposure)	n/a
Maximum pitch	90°	90°	90°	90°	n/a
No. of colours	2	1	3	8	8
Page	26	27	28	30	64

* Figures are for hook fixed Birkdale only. Minimum pitch for nail and rivet fixing is 20° (moderate exposure) or 22.5° (severe exposure).
** 4m max. rafter length.

Concrete interlocking tiles

					
	Edgemere range	Modern Duo Modern	Double Roman	Mendip	Ludlow Major
Features	Thin leading edge Duo replicates smaller format slates	Flat appearance Duo replicates smaller format slates	Traditional profile	Double pantile	Simple, strong lines Ideal for refurbishment
Size	420 x 330mm	420 x 330mm	420 x 330mm	420 x 330mm	420 x 330mm
Minimum pitch	17.5°	17.5° (Smooth)	22.5° (Smooth)	15°	22.5° (Smooth)
Maximum pitch	90°	90°	90°	90°	90°
No. of colours	3, 2, 1	6, 2	7	7	7
Page	37-39	40-41	42	43	44

					
	EcoLogic Ludlow Major	Ludlow Plus	Wessex	Anglia	Ashmore
Features	High level of recycled aggregate Absorbs NOx	Small format Ideal for refurbishment	Clean lines Water shedding efficiency	Bullnose leading edge Classic pantile	Interlocking double plain tile
Size	420 x 330mm	265 x 165mm	420 x 330mm	387 x 230mm	267 x 333mm
Minimum pitch	30°	22.5°	15°	25° (Smooth)	25°
Maximum pitch	90°	90°	90°	90°	90°
No. of colours	1	6	2	3	3
Page	45	46	47	48	49



Clay plain tiles and fittings

Canterbury handmade clay plain tile in Loxleigh

Canterbury handmade



True to tradition, a range of three distinctive handmade clay plain tile colours, with a fine sanded finish suitable for roofing and vertical tiling.

Colour availability

Key (F) Fine sanded finish



Technical data		
Size of tile	265mm x 165mm	
Minimum pitch*	40°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	13mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof)	53 tiles/m ² at 115mm gauge (vertical)
Weight of tiling (approx.)	74kg/m ² (0.73 kN/m ²) at 100mm gauge (roof)	66kg/m ² (0.64 kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof)	8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm	
Authority	BS EN 1304	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ Carbon footprint measurement

Product information

Tile camber
Single camber

Feature tiles
For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order

Club† Bullnose†

Ashdowne

Handcrafted clay plain tiles offer a warm, mellow appearance, with a granular texture and slight random irregularities that make each tile unique.



Colour availability

Key (F) Fine sanded finish



Technical data

Size of tile	265mm x 165mm	
Minimum pitch*	35°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	11mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof)	53 tiles/m ² at 115mm gauge (vertical)
Weight of tiling (approx.)	65kg/m ² (0.64 kN/m ²) at 100mm gauge (roof)	57kg/m ² (0.56 kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof)	8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm	
Authority	BS EN 1304	


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ Carbon footprint measurement

Product information

Tile camber
Single camber



Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†


Hawkins

Single cambered (longitudinal), machine-made clay tile, manufactured for over 150 years. This heritage, combined with modern firing techniques, gives a traditional colour range.



Colour availability

Key (F) Fine sanded finish (S) Smooth finish (T) Textured finish



Technical data

Size of tile	265mm x 165mm	
Minimum pitch*	30°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	11mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof)	53 tiles/m ² at 115mm gauge (vertical)
Weight of tiling (approx.)	64kg/m ² (0.63 kN/m ²) at 100mm gauge (roof)	56kg/m ² (0.55 kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof)	8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm	
Authority	BS EN 1304	


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ Carbon footprint measurement

Product information

Tile camber
Single camber



Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†


Acme double camber



Natural clay, machine-made plain tiles with longitudinal and latitudinal camber are able to create highly textured roofscapes with accentuated light and shade.

Colour availability

Key (F) Fine sanded finish (S) Smooth finish

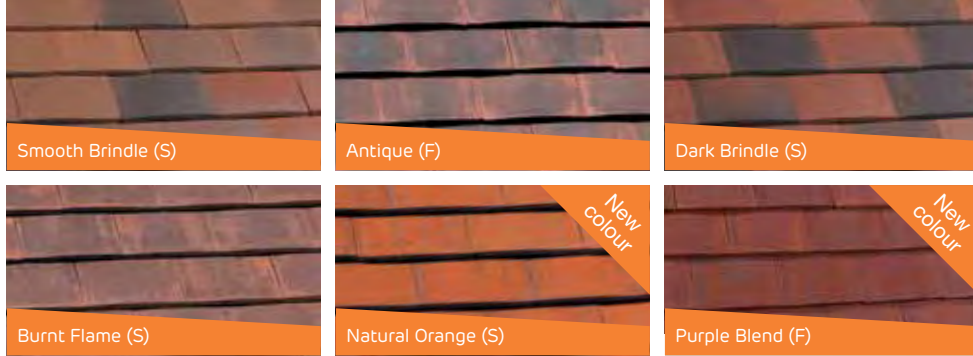

Technical data	
Size of tile	265mm x 165mm
Minimum pitch*	35°
Maximum pitch	90°
Minimum headlap	65mm (roof) 35mm (vertical)
Maximum gauge	100mm (roof) 115mm (vertical)
Tile thickness	11mm (nominal)
Cover width	165mm (nominal)
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof) 53 tiles/m ² at 115mm gauge (vertical)
Weight of tiling (approx.)	64kg/m ² (0.63 kN/m ²) at 100mm gauge (roof) 56kg/m ² (0.55 kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof) 8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	38mm x 2.65mm
Authority	BS EN 1304


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ Carbon footprint measurement

Product information


Tile camber
Double camber



Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†


Acme single camber



Natural clay, machine-made, single cambered (longitudinal) plain tiles, offering crisp, contemporary lines and the warmth and character of clay at an affordable price.

Colour availability

Key (F) Fine sanded finish (S) Smooth finish

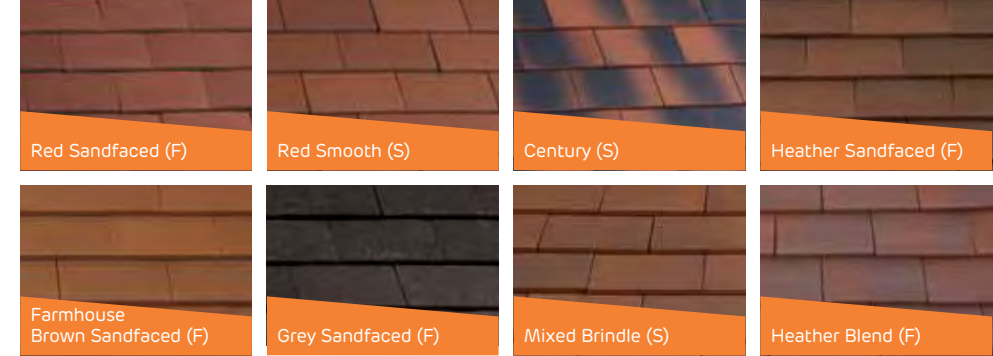

Technical data	
Size of tile	265mm x 165mm
Minimum pitch*	30°
Maximum pitch	90°
Minimum headlap	65mm (roof) 35mm (vertical)
Maximum gauge	100mm (roof) 115mm (vertical)
Tile thickness	11mm (nominal)
Cover width	165mm (nominal)
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof) 53 tiles/m ² at 115mm gauge (vertical)
Weight of tiling (approx.)	64kg/m ² (0.63 kN/m ²) at 100mm gauge (roof) 56kg/m ² (0.55 kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof) 8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	38mm x 2.65mm
Authority	BS EN 1304


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified
- ✓ Carbon footprint measurement

Product information


Tile camber
Single camber




Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†






















Clay fittings and accessories

Clay ridges, hips and valleys

Available in a range of colours and angles. Recommended roof pitch may vary depending on product and system used. For details of the full range of hips and valleys, please contact the Technical Advisory Service.

Important note: All of the fittings shown on this page can be used with all clay plain tiles, but should not be used on a rafter pitch below 35° with Acme double camber and Ashdowne clay plain tiles.

- 1 Made to order (subject to minimum order quantities)
- 2 Some colours and angles made to order (subject to minimum order quantities)
- 3 Staffordshire Blue available to order
- † Angle ridge wing length will vary depending on ridge angle








Clay crested ridges

Available in Red Smooth and Slate Black. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.

Clay finials

Available in a range of colours and angles. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.




Important note: All of the fittings shown on this page can be used with all clay plain tiles, but should not be used on a rafter pitch below 35° with Acme double camber and Ashdowne clay plain tiles.

- 1 Made to order (subject to minimum order quantities)
- 2 Some colours and angles made to order (subject to minimum order quantities)
- † Angle ridge wing length will vary depending on ridge angle

Clay fittings and accessories

Clay plain tile fittings

Available in a range of colours.

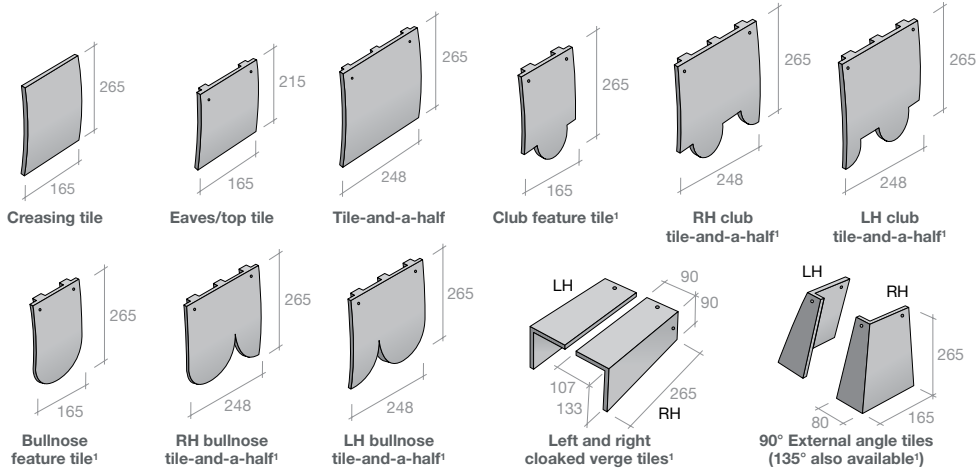


The following dry fix and/or ventilation systems can also be used with clay plain tiles (pages 56-57):

- > Universal 10mm and 25mm eaves vent systems
- > Universal plain tile vent
- > Universal GRP valley
- > Universal RidgeFast system (subject to ridge/hip angle)
- > Universal HipFast system (subject to ridge/hip angle)


Clay in-line tile vent

Available in a range of bases with real clay tile slips on the visible edge (3 tiles wide). The clay tile vent provides a net ventilation area of 7,500mm² per vent. Suitable for natural, mechanical or soil pipe ventilation.



¹ Made to order (subject to minimum order quantities)

Accessories



Tile vent adaptor

Flexible pipe



Clay interlocking tiles and fittings

Maxima clay pantile, Natural Red, Aberdare, Wales

Lincoln

The new Lincoln is an easy-to-fix clay pantile which balances traditional aesthetics with speed of installation.



Colour availability

Key (SS) Semi-sanded finish (S) Smooth finish



Rustic Red (SS)



Natural Red (S)

Technical data

Size of tile	370mm x 247mm
Minimum pitch*	17.5° (120mm headlap) 22.5° (75mm headlap)
Maximum pitch	70°
Minimum headlap	75mm
Maximum gauge	295mm
Cover width	222mm (nominal)
Covering capacity (net)	15.3 tiles/m ² at 75mm headlap 18.0 tiles/m ² at 120mm headlap
Weight of tiling (approx.)	43.0kg/m ² at 75mm headlap 50.4kg/m ² at 120mm headlap
Battens required (net)	3.4 lin./m ² at 75mm headlap 4.0 lin./m ² at 120mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	38mm x 3.35mm
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 1304

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Compatible dry fix and ventilation systems

- > Universal RidgeFast system (page 57)
- > Universal HipFast system (page 56)
- > Universal 10mm and 25mm eaves vent systems (page 56)
- > Universal GRP dry valley system (page 57)


Security fixing kits

- > Mortar bedded security ridge (page 53)
- > Mortar bedded security hip (page 53)




Lincoln fittings

Available in Rustic Red and Natural Red.

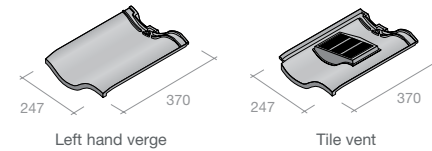

Lincoln ridges and hips

Available in Rustic Red and Natural Red.

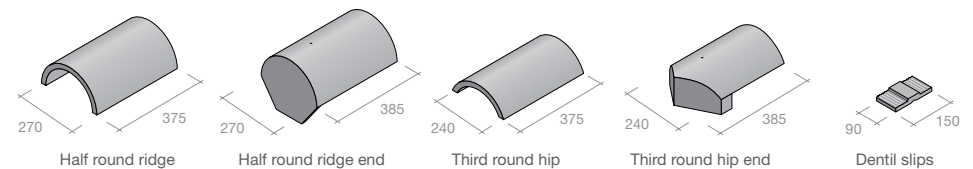

Note: All measurements in mm.

Maxima

A clay interlocking double roman tile, suitable for roof pitches down to 17.5°, with an easy-to-lay open gauge design.



Colour availability



Natural Red


Technical data

Size of tile	403mm x 333mm
Minimum pitch*	17.5°
Maximum pitch	70°
Minimum headlap	75mm
Batten spacing	328mm (at 75mm headlap)
Cover width	300mm (nominal)
Covering capacity (net)	10.1 tiles/m ² at maximum gauge
Weight of tiling (approx.)	43.4kg/m ² at 75mm headlap
Battens required (net)	3.05 lin.m/m ² at 75mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	45mm x 3.35mm aluminium clout head
Fixing clips	SoloFix (30443/30433), Eave clip (30452), Eave clip nail (30455), RH verge clip (30289), LH verge tile clip (30289), LH verge clip – standard tile (30290)
Authority	BS EN 1304

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Maxima fittings

Available in Natural Red.



Left hand verge tile
(double roll)

Melodie



An interlocking single clay pantile with an easy-to-install flexible gauge, which is suitable for roof pitches as low as 12.5°.



Colour availability



Natural Red


Technical data

Size of tile	440mm x 255mm
Minimum pitch*	12.5°
Maximum pitch	70°
Minimum headlap	92mm
Batten spacing	314mm (minimum gauge) 348mm (maximum gauge)
Cover width	209mm (nominal)
Covering capacity (net)	13.8 tiles/m ² at 92mm headlap
Weight of tiling (approx.)	44kg/m ² at 92mm headlap
Battens required (net)	2.88 lin.m/m ² at 92mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	45mm x 3.35mm aluminium clout head
Fixing clips	SoloFix (30435/30445), Eave clip (30452), Eave clip nail (30455), RH verge clip (30285), LH verge tile clip (30285)
Authority	BS EN 1304

* This minimum pitch is suitable for rafter lengths up to 6 metres. For longer rafter lengths, please contact our Technical Advisory Service.

Melodie fittings

Available in Natural Red.



Left hand verge tile
(double roll)


Note: All measurements in mm.

Note: All measurements in mm.

Clay interlocking tiles fittings and accessories

Concrete ridges and hips for use with Maxima and Melodie clay interlocking tiles

Available in Mosborough Red. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.

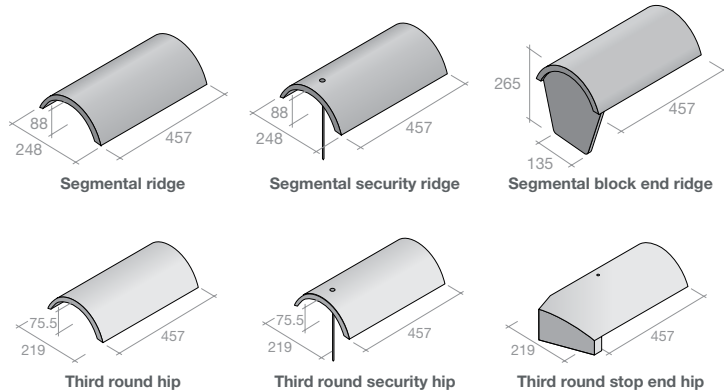

The following Universal products and accessories can be used with concrete segmental ridges, third round hip tiles and for use with Maxima and Melodie interlocking clay tiles.

- > Universal 10mm and 25mm eaves vent systems
- > Universal HipFast system
- > Universal RidgeFast system
- > Universal GRP dry valley
- > Universal tile vent (Maxima only)
- > Mortar bedded security ridge
- > Mortar bedded security hip



Fibre cement slates and fittings

Rivendale

A finely detailed surface and dressed edges that together reproduce the attractive appearance of natural slate.




Colour availability



Technical data		
Size of slate	600mm x 300mm	
Minimum pitch*	Moderate exposure	22.5° (100mm headlap) 20° (110mm headlap)
	Severe exposure	25° (100mm headlap) 22.5° (110mm headlap)
Maximum pitch	90°	
Typical headlaps	100, 110mm	
Maximum gauge	245-250mm	
Slate thickness	4mm (nominal)	
Covering capacity (net)	13.4 slates/m ² at 100mm headlap	
	13.6 slates/m ² at 110mm headlap	
Weight of slating (approx.)	20.4kg/m ² (0.20 kN/m ²) at 100mm headlap	
	20.9kg/m ² (0.20 kN/m ²) at 110mm headlap	
Battens required (net)	4.00 lin.m/m ² at 100mm headlap	
	4.08 lin.m/m ² at 110mm headlap	
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)	
	50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Fixings	Slate nails (30mm x 2.65mm)	
	Copper disc rivets (19mm diameter x 2mm stem)	
Authority	BS EN 492	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Edge profile

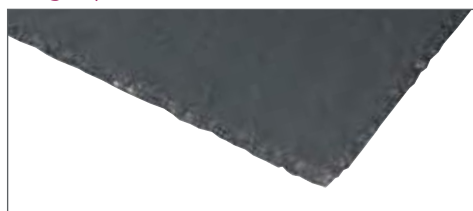

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK and Ireland produced fibre cement slates Element Ref: 812410008)
- ✓ BES 6001 Responsible Sourcing 'Very Good'
- ✓ EPD available for Rivendale slates

Garsdale

A detailed surface and square edge that closely resembles natural slate, but is easier and faster to install.



Colour availability



Technical data		
Size of slate	600mm x 300mm	
Minimum pitch*	Moderate exposure	22.5° (100mm headlap) 20° (110mm headlap)
	Severe exposure	25° (100mm headlap) 22.5° (110mm headlap)
Maximum pitch	90°	
Typical headlaps	100, 110mm	
Maximum gauge	245-250mm	
Slate thickness	4mm (nominal)	
Covering capacity (net)	13.4 slates/m ² at 100mm headlap	
	13.6 slates/m ² at 110mm headlap	
Weight of slating (approx.)	20.4kg/m ² (0.20 kN/m ²) at 100mm headlap	
	20.9kg/m ² (0.20 kN/m ²) at 110mm headlap	
Battens required (net)	4.00 lin.m/m ² at 100mm headlap	
	4.08 lin.m/m ² at 110mm headlap	
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)	
	50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Fixings	Slate nails (30mm x 2.65mm)	
	Copper disc rivets (19mm diameter x 2mm stem)	
Authority	BS EN 492	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Edge profile



Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK and Ireland produced fibre cement slates Element Ref: 812410008)
- ✓ BES 6001 Responsible Sourcing 'Very Good'
- ✓ EPD available for Garsdale slates

Birkdale

A smooth surface and dressed edges offer a traditional and pleasing look using nail and rivet fixing down to 20°.




Colour availability



Technical data		
Size of slate	600mm x 300mm	
Minimum pitch*	Moderate exposure	22.5° (100mm headlap) 20° (110mm headlap)
	Severe exposure	25° (100mm headlap) 22.5° (110mm headlap)
	Maximum pitch	90°
Typical headlaps	100, 110mm	
Maximum gauge	245-250mm	
Slate thickness	4mm (nominal)	
Covering capacity (net)	13.4 slates/m ² at 100mm headlap	
	13.6 slates/m ² at 110mm headlap	
Weight of slating (approx.)	20.4kg/m ² (0.20 kN/m ²) at 100mm headlap	
	20.9kg/m ² (0.20 kN/m ²) at 110mm headlap	
Battens required (net)	4.00 lin.m/m ² at 100mm headlap	
	4.08 lin.m/m ² at 110mm headlap	
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)	
	50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Fixings	Slate nails (30mm x 2.65mm)	
	Copper disc rivets (19mm diameter x 2mm stem)	
Authority	BS EN 492	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Edge profile

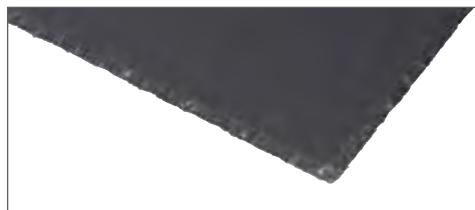

Sustainability


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK and Ireland produced fibre cement slates Element Ref: 812410008)
- ✓ BES 6001 Responsible Sourcing 'Very Good'
- ✓ EPD available for Birkdale slates



Low pitch Birkdale

Birkdale slates can be used for low pitches down to 15° (with hook fixing). This complements our Birkdale range using nail and rivet fixing for steeper pitches.

Colour availability



Technical data		
Size of slate	600mm x 300mm	
Minimum pitch*	Moderate exposure	15° (150mm lap, max. 6m rafter length)
	Severe exposure	17.5° (150mm lap, max. 9m rafter length)
Maximum pitch	90°	
Typical headlaps	150mm	
Maximum gauge	225mm	
Slate thickness	4mm (nominal)	
Covering capacity (net)	14.8 slates/m ² at 150mm headlap	
Weight of slating (approx.)	22.8kg/m ² (0.20 kN/m ²) at 150mm headlap	
Battens required (net)	4.45 lin.m/m ² at 150mm headlap	
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)	
	50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Fixings	Slate hooks (150mm)	
	Slate nails for local areas of roof (30mm x 2.65mm)	
	Copper disc rivets for local areas of roof (19mm diameter x 2mm stem)	
Authority	BS EN 492	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Edge profile



Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK and Ireland produced fibre cement slates Element Ref: 812410008)
- ✓ BES 6001 Responsible Sourcing 'Very Good'
- ✓ EPD available for Birkdale slates

Hook fixing


Watch a quick video on hook fixing at marleyeternit.co.uk/birkdale or scan the QR code shown.

Thrutone



A smooth surface and square cut edges give a low profile slate at an economical price with a minimum pitch of 15°.

Colour availability

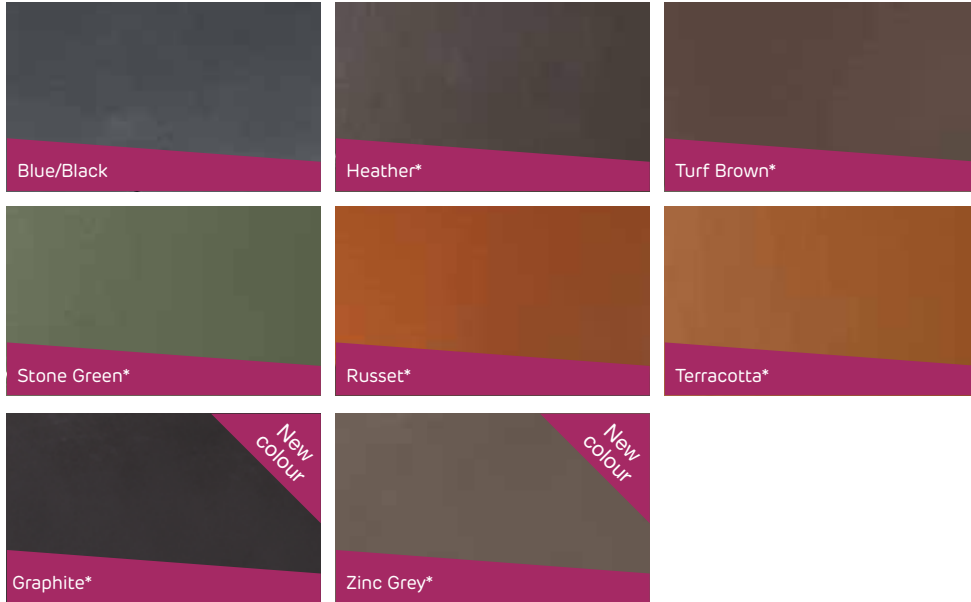

Shape availability



Technical data		
Size of slate	600mm x 300mm	500mm x 250mm
Minimum pitch*		
Moderate exposure	22.5° (100mm headlap) 20° (110mm headlap)	22.5° (100mm headlap)
Severe exposure	25° (100mm headlap) 22.5° (110mm headlap)	25° (100mm headlap)
4m max. rafter length	15°-17.5° (110mm headlap)	
6m max. rafter length	17.5°-20° (110mm headlap)	
Maximum pitch	90°	90°
Typical headlaps	100, 110mm	100mm
Maximum gauge	245-250mm	200mm
Slate thickness	4mm (nominal)	
Covering capacity (net)	13.4 slates/m ² at 100mm headlap 13.6 slates/m ² at 110mm headlap	20.0 slates/m ² at 100mm headlap
Weight of slating (approx.)	20.4kg/m ² (0.20 kN/m ²) at 100mm headlap 20.9kg/m ² (0.20 kN/m ²) at 110mm headlap	21.3kg/m ² (0.21 kN/m ²) at 100mm headlap
Battens required (net)	4.00 lin.m/m ² at 100mm headlap 4.08 lin.m/m ² at 110mm headlap	5.00 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Fixings	Slate nails (30mm x 2.65mm) Copper disc rivets (19mm diameter x 2mm stem)	Slate nails (30mm x 2.65mm) Copper disc rivets (19mm diameter x 2mm stem)
Authority	BS EN 492	BS EN 492

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Edge profile




Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK and Ireland produced fibre cement slates Element Ref: 812410008)
- ✓ BES 6001 Responsible Sourcing 'Very Good'
- ✓ EPD available for Thrutone slates


Fibre cement slate fittings

Increments are in 5° where ranges of angle are indicated.
 Available in Blue/Black. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service. **See pages 56-57 for Universal accessories, which are compatible with fibre cement slates.**


Also available: In-line ridge ventilator stepped adaptor, Flexible pipe.




Duo pitch ridge*
(15° to 60°)




Stop end for duo pitch ridge*
(15° to 60°)




Monopitch ridge*
(15° to 45°)




Stop end for monopitch ridge*
(15° to 45°)



In-line ridge ventilator plus extension sleeve
(20° to 45°)



In-line slate ventilator



Fibre cement ridge roll



Concrete plain tiles and fittings

Concrete plain tile, Smooth Grey, Workington, Cumbria


Plain



The authentic cross camber design of the Marley Eternit concrete plain tile gives it a look to match its outstanding versatility.

Colour availability

Key (F) Fine sanded finish (G) Granular finish (S) Smooth finish

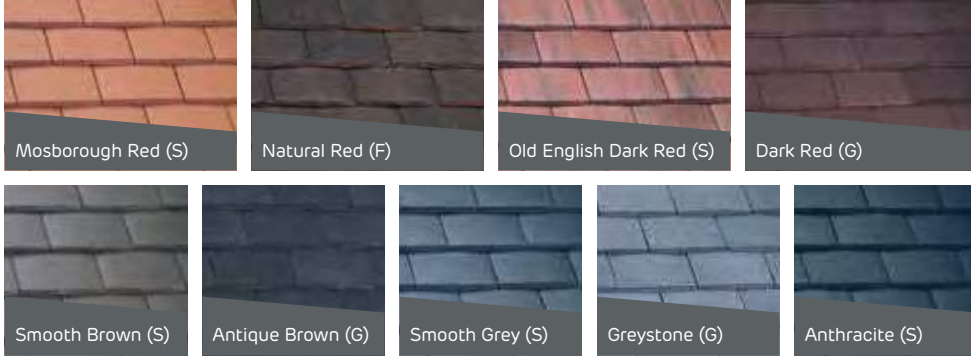

Technical data	
Size of tile	267mm x 168mm
Minimum pitch*	35°
Maximum pitch	90°
Minimum headlap	65mm (roof) 37.5mm (vertical)
Maximum gauge	100mm (roof) 115mm (vertical)
Tile thickness	12mm (nominal)
Cover width	168mm (nominal)
Covering capacity (net)	60 tiles/m ² at 100mm gauge (roof) 53 tiles/m ² at 115mm gauge (vertical)
Weight of tiling (approx.)	73.8kg/m ² (0.72 kN/m ²) at 100mm gauge (roof) 58kg/m ² (0.57 kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof) 8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	38mm x 2.65mm
Authority	BS EN 490


* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete plain tiles Element Refs: 812410017, 812410050, 812410064)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Product information

Tile camber
Single camber



Compatible with clay feature tiles
For advice on the use of Feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†




Bullnose†



Plain tile fittings

Available in all colours to match main tiles.

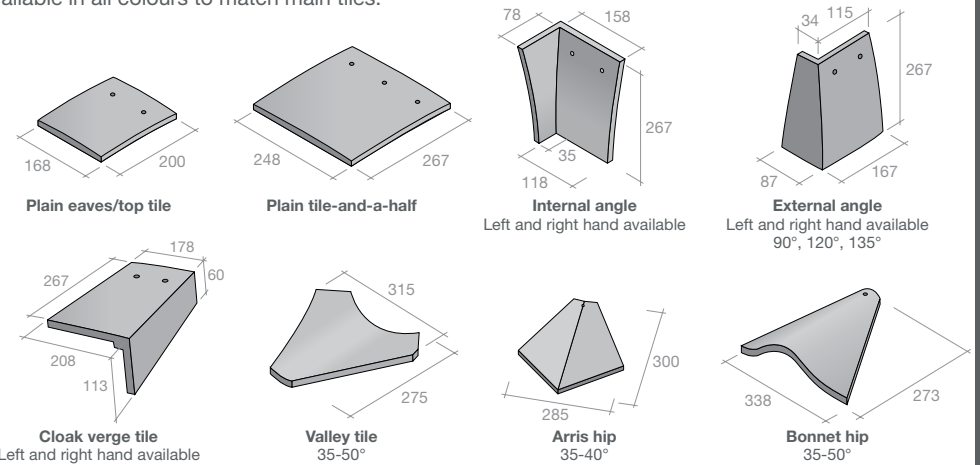


Verges, ridges and hips

For ridges and hips compatible with concrete plain tiles, see page 50.

Note: All measurements in mm.

Edgemere

A clean and precise slate-like appearance is enhanced by the thin leading edge and the broken bond laying technique.



Colour availability

Key (S) Smooth finish



Technical data

Size of slate	420mm x 330mm
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm (22.5° and above) 100mm (below 22.5°)
Maximum gauge	345mm
Tile thickness	18mm (nominal)
Cover width	298mm (nominal)
Hanging length	395mm (nominal)
Covering capacity (net)	9.7 slates/m ² (0.43 kN/m ²) at 75mm headlap 10.5 slates/m ² (0.47 kN/m ²) at 100mm headlap
Weight of slating (approx.)	44kg/m ² (0.43 kN/m ²) at 75mm headlap 47.5kg/m ² (0.47 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap 3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixings	45mm x 3.35mm slate nails
Fixing clips	Eaves, verge and slate clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.


Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Edgemere half slate

Available in all colours to match main tiles.

Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of half slates, to form verges in alternate courses. Half slates are formed on site by cutting along the scoreline.




Concrete interlocking tiles and fittings

Mendip interlocking tiles, Mosborough Red, Dog Rescue Centre, Blidworth

Note: All measurements in mm.

Duo Edgemere



A thin leading edge interlocking slate designed to look like and blend in with small format slates.

Colour availability

Key (S) Smooth finish



Technical data

Size of slate	420mm x 330mm
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm (22.5° and above) 100mm (below 22.5°)
Maximum gauge	345mm
Tile thickness	18mm (nominal)
Cover width	298mm (nominal)
Hanging length	395mm (nominal)
Covering capacity (net)	9.7 slates/m ² (0.43 kN/m ²) at 75mm headlap 10.5 slates/m ² (0.47 kN/m ²) at 100mm headlap
Weight of slating (approx.)	44kg/m ² (0.43 kN/m ²) at 75mm headlap 47.5kg/m ² (0.47 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap 3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixing	45mm x 3.35mm slate nails
Fixing clips	Eaves, verge and slate clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Laying Duo Edgemere

Duo Edgemere should be laid quarter bond. The required quarter bond pattern is created by the introduction of three-quarter width slates, cut from standard slates on site to form verges in alternate courses.

Riven Edgemere



A thin leading edge interlocking slate with the addition of a riven surface, providing a more natural appearance with variegated look, depth and tone.

Colour availability

Key (S) Smooth finish



Technical data

Size of slate	420mm x 330mm
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm (22.5° and above) 100mm (below 22.5°)
Maximum gauge	345mm
Tile thickness	18mm (nominal)
Cover width	298mm (nominal)
Hanging length	395mm (nominal)
Covering capacity (net)	9.7 slates/m ² (0.43 kN/m ²) at 75mm headlap 10.5 slates/m ² (0.47 kN/m ²) at 100mm headlap
Weight of slating (approx.)	44kg/m ² (0.43 kN/m ²) at 75mm headlap 47.5kg/m ² (0.47 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap 3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixing	45mm x 3.35mm slate nails
Fixing clips	Eaves, verge and slate clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.


Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Laying Riven Edgemere

Riven Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of three-quarter width slates, cut from standard slates on site to form verges in alternate courses.


Modern



A flat, smooth, single lap interlocking design, whose appearance is enhanced by the required broken bond laying pattern.

Colour availability

Key (G) Granular finish (S) Smooth finish

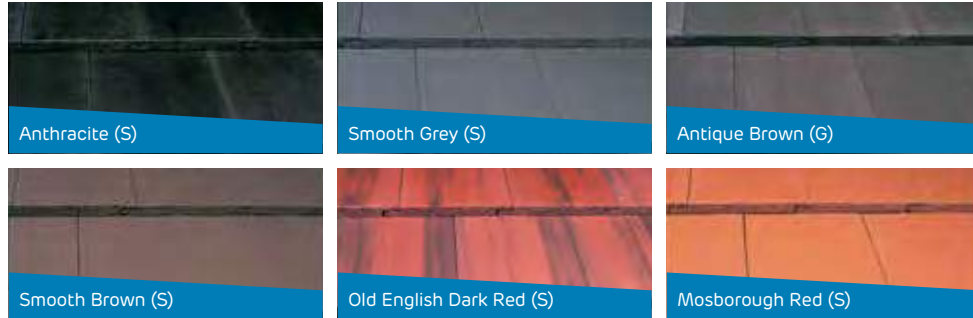

Technical data		
Size of tile	420mm x 330mm	
Minimum pitch*	22.5° Smooth (75mm headlap) 17.5° Smooth (100mm headlap)	30° Granular (75mm headlap) 25° Granular (100mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Tile thickness	30mm (nominal)	
Cover width	292mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.9 tiles/m ² at 75mm headlap	10.7 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	50kg/m ² (0.49 kN/m ²) at 75mm headlap	54kg/m ² (0.53 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap	3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	50mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.


Sustainability

- ✓ A⁺ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Modern fittings


Available in all colours to match main tiles.

Modern should be laid broken bond. The required broken bond pattern is created by the introduction of half tiles, to form verges in alternate courses. Half tiles are formed on site by cutting along the scoreline.



Note: All measurements in mm.

Duo Modern



A flat, smooth, single lap, interlocking tile with a 'mock bond' joint is enhanced by the required broken bond laying technique.

Colour availability

Key (S) Smooth finish



Technical data		
Size of tile	420mm x 330mm	
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)	
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Tile thickness	30mm (nominal)	
Cover width	292mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.9 tiles/m ² at 75mm headlap	10.7 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	50kg/m ² (0.49 kN/m ²) at 75mm headlap	54kg/m ² (0.53 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap	3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	50mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A⁺ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Laying Duo Modern

Duo Modern should be laid quarter bond. The required quarter bond pattern is created by the introduction of three-quarter width tiles, cut from standard tiles on site to form verges in alternate courses.

Double Roman



A 2000 year old profile with precision-engineered functionality.

Colour availability

Key (G) Granular finish (S) Smooth finish



Technical data


Size of tile	420mm x 330mm	
Minimum pitch*	25° Smooth (75mm headlap) 22.5° Smooth (100mm headlap)	30° Granular (75mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	28mm (nominal)	
Profile depth	d > 20mm	
Overall depth	53mm	
Cover width	300mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.7 tiles/m ² at 75mm headlap	10.4 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	44kg/m ² (0.43 kN/m ²) at 75mm headlap	47kg/m ² (0.46 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap	3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	65mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A⁺ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement


Mendip



A double pantile design with elegant flowing lines, providing instant visual appeal.

Colour availability

Key (G) Granular finish (S) Smooth finish

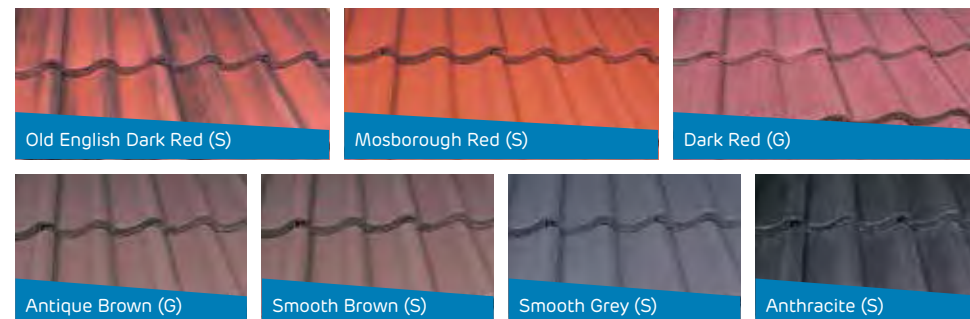

Technical data

Size of tile	420mm x 330mm	
Minimum pitch*	17.5° Smooth (75mm headlap) 15° Smooth (100mm headlap)	30° Granular (75mm headlap) 25° Granular (100mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	27mm (nominal)	
Profile depth	d > 20mm	
Overall depth	59mm	
Cover width	298mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.7 tiles/m ² at 75mm headlap	10.5 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	46kg/m ² (0.45 kN/m ²) at 75mm headlap	49kg/m ² (0.48 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap	3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	70mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability


- ✓ A⁺ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Extended rafter lengths

Mendip interlocking tiles can now perform at extended rafter lengths as follows:

- 15 - 17.5° pitch with a rafter length up to and including 15m will require a 100mm headlap.
- 17.5° pitch and above with a rafter length up to and including 15m will require a 75mm headlap.



Ludlow Major



Simple, strong lines exploit the interplay between light and shade.

Colour availability

Key (G) Granular finish (S) Smooth finish



Technical data

Size of tile	420mm x 330mm	
Minimum pitch*	25° Smooth (75mm headlap) 22.5° Smooth (100mm headlap)	30° Granular (75mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	25mm (nominal)	
Profile depth	d > 11mm	
Cover width	295mm (nominal)	
Hanging length	399mm (nominal)	
Covering capacity (net)	9.8 tiles/m ² at 75mm headlap	10.6 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	45kg/m ² (0.44 kN/m ²) at 75mm headlap	49kg/m ² (0.48 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap	3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	55mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A⁺ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

EcoLogic Ludlow Major




The unique EcoLogic coating applied to the Ludlow Major tile, removes nitrogen oxides and other pollutants from the atmosphere. The tile also includes much higher levels of recycled content.

Colour availability



EcoLogic composition

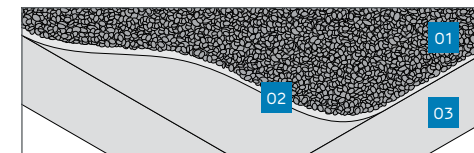

Key (G) Granular finish

- 01 Photocatalytic granules stimulated by sunlight to remove NOx
- 02 Photocatalytic pigmented slurry adhesive
- 03 Concrete body containing nearly 50% recycled material

Technical data


Size of tile	420mm x 330mm	
Minimum pitch*	30° (75mm headlap)	
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	25mm (nominal)	
Profile depth	d > 11mm	
Cover width	295mm (nominal)	
Hanging length	399mm (nominal)	
Covering capacity (net)	9.8 tiles/m ² at 75mm headlap	10.6 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	45kg/m ² (0.44 kN/m ²) at 75mm headlap	49kg/m ² (0.48 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap	3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	55mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A⁺ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement
- ✓ High level of recycled content

Ludlow Plus



Ideal for refurbishment applications, where its smaller format reduces wastage.

Colour availability



Key (G) Granular finish (S) Smooth finish

Technical data


Size of tile	387mm x 229mm	
Minimum pitch*	25° Smooth (75mm headlap) 22.5° Smooth (100mm headlap)	30° Granular (75mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	312mm	
Body thickness	25mm (nominal)	
Profile depth	d > 11mm	
Cover width	204mm (nominal)	
Hanging length	361mm (nominal)	
Covering capacity (net)	15.7 tiles/m ² at 75mm headlap	17.1 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	47kg/m ² (0.46 kN/m ²) at 75mm headlap	51kg/m ² (0.50 kN/m ²) at 100mm headlap
Battens required (net)	3.2 lin.m/m ² at 75mm headlap	3.5 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	50mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Wessex



Designed to shed water efficiently at pitches down to 15°, the Wessex has clean, simple lines with a pleasing minimalist style.

Colour availability

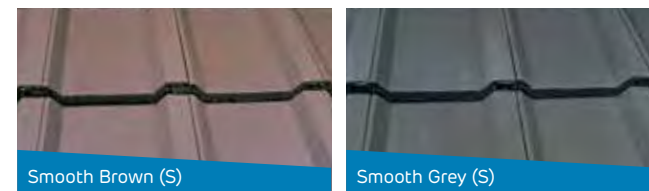

Key (S) Smooth finish

Technical data


Size of tile	420mm x 330mm	
Minimum pitch*	15°	
Maximum pitch	44°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	29mm (nominal)	
Profile depth	d > 20mm	
Overall depth	56mm	
Cover width	298mm (nominal)	
Hanging length	403mm (nominal)	
Covering capacity (net)	9.7 tiles/m ² at 75mm headlap	10.5 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	50kg/m ² (0.49 kN/m ²) at 75mm headlap	53kg/m ² (0.52 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap	3.1 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Anglia



A single lap interlocking concrete tile with the classic clay pantile profile and a bullnosed leading edge design.

Colour availability

Key (G) Granular finish (S) Smooth finish



Technical data

Size of tile	387mm x 230mm	
Minimum pitch*	30° Smooth (75mm headlap) 25° Smooth (100mm headlap)	30° Granular (75mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	312mm	
Body thickness	30mm (nominal)	
Profile depth	d > 20mm	
Overall depth	71mm	
Cover width	204mm (nominal)	
Hanging length	370mm (nominal)	
Covering capacity (net)	15.7 tiles/m ² at 75mm headlap	17.1 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	47kg/m ² (0.46 kN/m ²) at 75mm headlap	51kg/m ² (0.50 kN/m ²) at 100mm headlap
Battens required (net)	3.2 lin.m/m ² at 75mm headlap	3.5 lin.m/m ² at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement


Ashmore



A single lap, interlocking double plain tile, with the engineered precision and ease of installation of an interlocking tile.

Colour availability

Key (S) Smooth finish



Technical data

Size of tile	267mm x 333mm	
Minimum pitch*	25° (77mm headlap)	22.5° (92mm headlap)
Maximum pitch	90°	
Minimum headlap	77mm	
Maximum gauge	190mm	
Tile thickness	16mm (nominal)	
Cover width	302mm (nominal)	
Hanging length	235mm (nominal)	
Covering capacity (net)	17.5 tiles/m ² at 77mm headlap	19 tiles/m ² at 92mm headlap
Weight of tiling (approx.)	48kg/m ² (0.47 kN/m ²) at 77mm headlap	52kg/m ² (0.51 kN/m ²) at 92mm headlap
Battens required (net)	5.3 lin.m/m ² at 77mm headlap	5.8 lin.m/m ² at 92mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	45mm x 3.35mm	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.


Sustainability

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Carbon footprint measurement

Ashmore fittings

Available in all colours to match main tiles.

Ashmore tiles should be laid broken bond. The required broken bond pattern is created by the introduction of three-quarter width tiles in alternate courses. Tile-and-a-half tiles are available for use at hips and valleys.

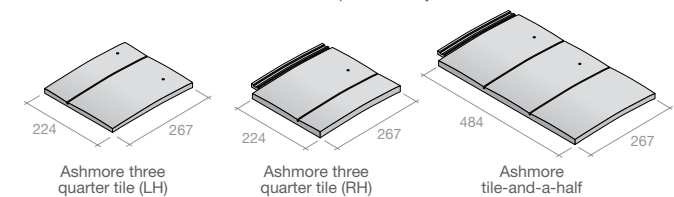


Note: All measurements in mm.

Concrete fittings


Verges, ridges and hips

Available in a range of colours to match main tiles.
Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.


- † Compatible with Marley Eternit ventilated dry ridge system.
- ‡ Compatible with Marley Eternit dry hip system.
- § Compatible with Marley Eternit Universal HipFast.
- * Compatible with Marley Eternit Universal RidgeFast.




Cloak verge
Modern, Mendip and Double Roman (see page 59)




Modern ridge†‡*
15-55° dry ridge




Modern security ridge
15-45° bedded




Modern mono ridge
15-45° bedded




Segmental ridge†*
15-55° dry ridge




Segmental security ridge
15-50° bedded




Segmental mono ridge†
15-55° dry ridge




Segmental mono block end ridge
15-55° dry ridge




Modern mono block end ridge
15-45° bedded




1/3 round hip tile‡§
17.5-45° dry ridge



Segmental block end ridge*
15-55° dry ridge




Modern block end ridge*
15-55° dry ridge




125° Angle ridge/hip 15-25° Security 125° Angle ridge/hip 15-25°


Also available:
145° Angle ridge hip 15-22.5° Security 145° Angle ridge/hip 15-22.5°




90° Angle ridge/hip 45-50° bedded
Also available:
Security 90° Angle ridge/hip 45-50°




Pascoll roll baby ridge
15-45°



1/2 round baby ridge
15-55°



Ridge vent terminal
15-55° dry ridge



Gas vent ridge terminal
15-55° dry ridge

Also available: **Gas vent ridge for condensing boilers**
Modern ridge 15-55°
Segmental ridge 15-55°

Note: All measurements in mm.



Fixings

Universal HipFast system (with concrete third round hip tiles and Ashmore Old English Dark Red interlocking tiles), Windsor

Fixings

SoloFix

Manufactured from Zial®, an integrated clip and nail that is quick and simple to install.

See page 6 for more information.

Profile	Pack size 500	Pack size 100
	Code No.	Code No.
Modern	30430	30440
Ludlow Major/EcoLogic	30430	30440
Ludlow Plus	30430	30440
Edgemere range	30431	30441
Mendip	30432	30442
Wessex	30432	30442
Double Roman	30433	30443
Anglia	30434	30444
Lincoln	30434	30444
Maxima	30433	30443
Melodie	30445	30445

Aluminium verge and eaves clip packs

The table below shows the quantities packaged together with the correct sized nail.

Profile	Right hand verge clip & nail pack 50 clips & nails	Left hand verge clip & nail pack 50 clips & nails	Eave clip & nail pack 100 clips & nails
	Code No.	Code No.	Code No.
Ludlow Plus	30290	30290	30277
Anglia	30284	30286	30274
Ludlow Major/EcoLogic	30287	30287	30277
Mendip	30288	30287	30276
Double Roman	30289	30290	30275
Wessex	30286	30286	30278
Modern	30290	30290	30273
Duo Modern	30290	30290	30273
Edgemere range	30263	30263	30297
Ashmore*	30263	30263	30297
Lincoln	30284	30286	30452
Maxima	30289	30290 [†] , 30289 [‡]	30452 [§] , 30455 [§]
Melodie	30285	30285	30452 [§] , 30455 [§]

* Clips only † For standard tile ‡ For verge tile § Nails only

Fibre cement slate fixings

Description	Colour	Quantity
Copper disc rivets	-	1000
Copper nails	-	1000
60mm x 14 gauge self-sealing screws	Blue/Black	100
Slate hooks for low pitch Birkdale	-	500

Stainless steel fixings


Description	Code No.	Quantity
Ashmore clip and nail pack	30130	100

Aluminium nail packs

Profile	Code No.	Pack No.	Approx. count
Plain	30348	25	793
Anglia, Lincoln	30349	26	520
Ludlow Plus, Modern, Duo Modern	30350	27	396
Double Roman	30351	28	308
Mendip	30352	29	287
Edgemere range, Ashmore, Melodie, Maxima,	30398	31	432
Ludlow Major/EcoLogic	30371	32	373

Mortar bedded security kits

See page 7 for more information.



Mortar bedded security ridge

Mechanical fixing system for mortar bedded ridge tiles, helping house builders and contractors meet British Standards and NHBC guidelines.

Mortar bedded security ridge kit (illustrated above)

- 10 No. batten brackets
- 13 No. clamps
- 13 No. 75mm x 4.8mm s/s screws
- 40 No. 25mm x 2.65mm s/s ARS nails

100mm x 4.8mm deep ridge screw pack (for clay half round ridge with profiled tiles)

Watch a quick video on mortar bedded mechanical fixing at marleyeternit.co.uk/securityridge or scan the QR code below



Mortar bedded security hip

Mechanical fixing system for mortar bedded hip tiles, helping house builders and contractors meet British Standards and NHBC guidelines.

Mortar bedded security hip kit (illustrated above)

- 6 No. batten brackets
- 13 No. clamps
- 13 No. 75mm x 4.8mm s/s screws
- 40 No. 25mm x 2.65mm s/s ARS nails

Tile tail clip pack 43602
Tile head clip pack 43604

100mm x 4.8mm deep ridge screw pack (for clay third round hips with profiled tiles)

Secret cut tile clip pack 43607

Watch a quick video on mortar bedded mechanical fixing at marleyeternit.co.uk/securityhip or scan the QR code below



More about our dry fix systems

Our website contains a wealth of information about dry fix and ventilation solutions, including the Universal range, which not only works with our roof tiles and slates, but those of other manufacturers too:

www.marleyeternit.co.uk/dryfix

System selector

	Clay plain tiles	Lincoln	Maxima	Melodie	Concrete plain tiles	Fibre cement slates	Edgemere range	Modern / Duo Modern	Double Roman	Mendip	Ludlow Major / Ecologic	Wessex	Ludlow Plus	Anglia	Ashmore
Universal roofing accessories															
10mm eaves vent system	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
25mm eaves vent system	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Dry verge								✓	✓	✓	✓	✓	✓	✓	✓
HipFast	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
RidgeFast	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Tile vent	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓
GRP dry valley system	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
Ridge Roll for fibre cement slates						✓									
Dry verge															
Cloak verge system	✓				✓			✓*	✓	✓					
Slate verge trim						✓									
Edgemere dry verge							✓								
Ashmore dry verge	✓				✓										✓
Dry hip															
Dry hip system					✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
Dry hip with duo pitch ridges						✓									
Dry valley															
Plain tile valley	✓				✓										
GRP interlocking slate dry valley system							✓								
Ventilated dry ridge															
Ventilated dry ridge					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Ventilated mono dry ridge					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Fibre cement ventilated ridges						✓									
Ventilation terminals															
Gas vent ridge terminals					✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
Ridge vent terminals					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
In-line vents and contour vents	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Tile vent terminals		✓					✓	✓	✓	✓	✓	✓	✓	✓	✓
Ridge vent for condensing boiler					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

* Suitable for Modern only

Dry fix and ventilation

Universal HipFast system

Universal roofing accessories

Suitable for use with Marley Eternit roofing products and those of other manufacturers.†



UNIVERSAL 10mm/25mm eaves vent

Designed to provide low level ventilation to roof voids in an efficient and unobtrusive manner for roof pitches from 12.5-55°. For all tiles and slates.

Universal 10mm eaves vent system (6m pack)	46350
- 6m eaves rafter roll	
- 10 No. felt support tray	
- 6 No. strip ventilator	
Universal 25mm eaves vent system (6m pack)	46351
- 6m eaves rafter roll	
- 10 No. felt support tray	
- 6 No. strip ventilator	
Comb filler strip	30425
Continuous rafter roll (2 x 6m)	46323
Gutter spacers (20 No.)	46353

Find out more at marleyeternit.co.uk/eavesvent or scan the QR code shown



UNIVERSAL Dry verge

Designed for use with large format interlocking tiles installed at a range of headlaps and rafter pitches from 15-45° (suitable up to 55° subject to ridge system).

Dry verge system	
28 No. left hand units	391*
28 No. right hand units	392*
Fixing kit (also available)	53930
End caps	
Modern ridge	394*
Segmental ridge	395*
Modern mono-ridge Left hand	408*
Right hand	409*
Segmental mono-ridge Left hand	427*
Right hand	428*
Dry verge refurbishment kit	53580

* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

Find out more at marleyeternit.co.uk/dryverge or scan the QR code shown




UNIVERSAL HipFast

Simple and rapidly installed ventilated dry hip system, compatible with all tiles and slates up to 45° (suitable up to 60° subject to tile/slate profile and hip tile type).

Universal HipFast system (6m pack)	53400
- 6m length hip roll	
- 6 No. batten brackets	
- 13 No. hip unions	
- 2 No. tapered filler units	
Fixing material	
- 24 No. tile head clips	
- 30 No. tile tail clips	
Hip support trays	34002
- 9 No. 715mm	
RidgeFast/HipFast Union Packs	53303
100mm x 4.8mm deep ridge screw pack (for clay third round hips with profiled tiles)	
Secret cut tile clip pack	43607

Find out more at marleyeternit.co.uk/hipfast or scan the QR code shown



UNIVERSAL RidgeFast

Simple and rapidly installed ventilated dry ridge system providing 5mm continuous ridge ventilation and compatible with all tiles and slates from 15-60° dependent on circumstances*.

Universal RidgeFast system (6m pack)	53300
- 6m length ridge roll	
- 10 No. ridge batten brackets	
- 13 No. ridge union straps	
- 13 No. ridge union clamps	
RidgeFast roll applicator (optional)	33002
RidgeFast blanking tape (optional)	33001
100mm x 4.8mm deep ridge screw pack (for clay half round ridge with profiled tiles)	70000
RidgeFast/HipFast Union Packs	53303

* Contact Technical Advisory Service for more information

Find out more at marleyeternit.co.uk/ridgefast or scan the QR code shown



UNIVERSAL Tile vent

Suitable for roof void ventilation and connection to 110mm soil/mechanical extraction. Compatible with large format interlocking tiles and roof pitches 20° and above.

Universal Tile vent	
Grey	36700
Brown	36703
Terracotta	36704
Flexible pipe	39091

Find out more at marleyeternit.co.uk/tilevent or scan the QR code shown



UNIVERSAL GRP dry valley

Mortar free solution suitable for use with concrete interlocking tiles/slates and concrete/clay plain tiles. Suitable on rafter pitches from 17.5-60° and accommodates up to 20° pitch difference either side of valley.

Universal GRP dry valley (3m lengths)	
low profile	30422
high profile	30421



More about our dry fix systems

Our website contains a wealth of information about dry fix and ventilation solutions, including the Universal range, which not only works with our roof tiles and slates, but those of other manufacturers too:

www.marleyeternit.co.uk/dryfix

Dry fix and ventilation



UNIVERSAL Plain tile vent


Designed for natural, mechanical or soil pipe ventilation. Provides 10,000mm² free area of ventilation and suitable for concrete and clay plain tile roof pitches 22.5° and above†.

Universal plain tile vent	
Grey	45501
Brown	45503
Red	45505

Flexible pipe ID 110mm (sold separately)	39091
--	-------

Pressure resistance values	
Pa (litres/sec airflow)	15 30 60
Free air area 10,000mm ²	13.6 53.7 21

† Please note minimum pitch of tile will apply.



UNIVERSAL Ridge roll for fibre cement slates

Simple and rapidly installed dry fix system providing 5mm continuous ridge ventilation. Compatible with fibre cement slates and ridges.

Ridge roll		33010
Fibre cement ventilated dry ridge (illustrated above)		
Duo pitch ridge	(no code)	
Stop end for duo pitch ridge	(no code)	
Mono ridge	(no code)	
Stop end for mono ridge	(no code)	
Ventilated ridge roll	(no code)	



Slate continuous verge trim

Fibre cement slate dry verge provides a mechanically fixed, durable, maintenance free verge solution for rafter pitches up to 55° with fibre cement slates and natural slates.

Slate verge trim	
Fibre cement slates (3 metre)	42206



Ashmore and plain tile continuous dry verge

Ashmore and plain tile continuous dry verge provides a strong, weathertight and maintenance-free verge that meets the requirements of BS 5534. The system is fast and simple to install and offers sleek, uninterrupted verges without the need for mortar.

Ashmore and plain tile dry verge	
Verge section (3 metre)	38501
Fixing kit	38510



Cloak verge systems

Provides a mechanically fixed, durable, maintenance free verge solution. Suitable up to 45° for Mendip, Modern, Double Roman tiles and 55° for plain tiles.

Mendip cloak verge (illustrated above)	
Left hand	245
Right hand	246
Mendip half tile	147
Mendip fixing kit	54252
Double Roman cloak verge	
Left hand	265
Right hand	266
Double Roman half tile	102
Double Roman fixing kit	54252
Concrete plain tile cloak verge	
Left hand	249
Right hand	250
Segmental block end ridge	
191	
Segmental mono block end ridge	
Left hand	189
Right hand	190
Modern cloak verge	
Left hand	371
Right hand	370
Modern cloak verge half tile	372
Modern fixing kit	37300
Modern block end ridge	
374	
Modern mono block end ridge	
Left hand	375
Right hand	376
Clay plain tile cloak verge (no code)	
Available in all colours to match main tiles.	



Edgemere dry verge system

Compatible with Edgemere, installed at a range of headlaps and rafter pitches from 17.5-45° (suitable up to 55° when used with the 'steep pitch ridge batten section', see Dry ridge system).

Verge units	
Left hand	381*
Right hand	382*
Edgemere dry verge fixing kit	
53830	
End caps	
Edgemere ridge	384*
Modern mono-ridge	
Left hand	408*
Right hand	409*
Dry verge refurbishment kit	
53580	

* Suffix with colour code 01 Grey, 03 Brown



More about our dry fix systems

Our website contains a wealth of information about dry fix and ventilation solutions, including the Universal range, which not only works with our roof tiles and slates, but those of other manufacturers too:

www.marleyeternit.co.uk/dryfix



Dry fix and ventilation



Ventilated dry hip system

Suitable for all concrete tiles when used in conjunction with Third round or Modern hip tiles for roof pitches 15-45°.

Batten sections

Low profile	43300
High profile	43400

Fixing kits

Low profile	54360
High profile	54361

Hip tail clip pack	43602
--------------------	-------

Ridge unions

Modern ridge union	4140*
Third round hip union	4350*

Apex caps

Modern hip apex cap	(15-24°) 4381*
	(25-35°) 4382*
	(36-45°) 4383*
Third round hip apex cap	(15-24°) 4371*
	(25-35°) 4372*
	(36-45°) 4373*

Block end hip tiles

Third round block end hip tile	291
Modern block end hip tile	292

* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta



GRP Slate valley system

The GRP Valley for large format tiles and Slate GRP Dry Valley for fibre cement slates are both suitable for roof pitches from 22.5° to 45°.

GRP valley for fibre cement slates	30578
------------------------------------	-------



Ventilated dry ridge system

Mechanically fixed, weathertight and mortar free solution providing 5mm continuous ridge ventilation. Suitable for concrete tiles and fibre cement slates when used on roof pitches up to 55°**.

Batten sections

Low profile	41101
High profile	41201
Steep pitch (low profile)	41102
Steep pitch (high profile)	41202

Ridge unions

Segmental ridge union	413*
Modern ridge union	414*
Modern/segmental adaptor ridge union	420*

Fixing Kits

Concrete tiles & slates fixing kit	41000
------------------------------------	-------

Filler units†

Double Roman - vented	42105
Plain, Modern, Duo Modern, Edgemere - vented	41501
Double lap slates - vented	41703
Ludlow Major/EcoLogic - vented	41601
Ludlow Plus - vented	41508
Mendip - vented	41701
Wessex - vented	41901
Anglia - vented	41506
Dry ridge set out gauge	41001


Apex caps

Segmental ridge junction	439*
Modern ridge junction	440*

* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

** For roof pitches over 35°, speak to the Marley Eternit Technical Advisory Service

† Where non-vented dry ridge is required, use Blanking Tape (2 x 2m, code 33001)



Ventilated dry mono ridge system

Mechanically fixed, weathertight and mortar free solution providing 5mm continuous ridge ventilation. Suitable for concrete tiles and fibre cement slates when used on roof pitches up to 55°.

Batten sections

Low profile	41101
High profile	41201
Steep pitch (low profile)	41102
Steep pitch (high profile)	41202

Ridge unions

Segmental mono-ridge union	423*
----------------------------	------

Fixing Kits

Concrete tiles & slates fixing kit	41000
------------------------------------	-------

Filler units†

Double Roman - vented	42105
Plain, Modern, Duo Modern, Edgemere - vented	41501
Double lap slates - vented	41703
Ludlow Major/EcoLogic - vented	41601
Ludlow Plus - vented	41508
Mendip - vented	41701
Wessex - vented	41901
Anglia - vented	41506
Dry ridge set out gauge	41001

Apex caps

Top abutment support strip	42505
Top abutment fixing kit	41000

* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

† Where non-vented dry ridge is required, use Blanking Tape (2 x 2m, code 33001)



Ridge vent terminals

Suitable for natural soil, or mechanical ventilation. Provides high level ventilation for concrete tiles (9,500mm² free area), clay plain tiles or fibre cement slates (10,000mm² free area).

Ridge vent terminal

Illustrated above – for natural ventilation of the roof void apex and connection to mechanical ventilation systems.

For concrete tiles	198
--------------------	-----

Gas vent ridge terminal for condensing boilers

Segmental	254
Modern	255

Gas vent ridge terminal (concrete tiles)

For connection to gas appliances of rated input of 60 Kw max. only (not suitable for gas condensing boilers or oil fired boilers).

With extension piece	256
Gasket set (spare)	30346

Plumbers accessory pack	39090
-------------------------	-------

For full product codes, please speak to Customer Services on 08705 626400.



Tile vent terminals

Available in a wide range of colours and finishes, provides for high/low level roof space ventilation. Suitable for natural soil, or mechanical ventilation (except Ashmore)†.

Terminals (with spigot)

Mendip (illustrated above)	294
Edgemere	259
Modern	295
Wessex	296
Ludlow Major/EcoLogic	297
Double Roman	298

Flexible pipe	39091
---------------	-------

Ventilation roof tiles (with catchment tray)


Ashmore	263
---------	-----

Available in all colours to match main tiles.

† Minimum pitch of tile will apply.



Dry fix and ventilation



Contour in-line vents

Discreet high performance vent terminals for high/low level roof space ventilation. Suitable for soil and mechanical ventilation. Minimum roof pitch 22.5° (except Plain tiles 35°).

Contour tile vents

Mendip	452*
Ashmore	450*
Plain	455*
Edgemere	465*
Modern	451*
Wessex	459*
Ludlow Major/EcoLogic	456*
Double Roman	453*
Ludlow Plus	457*
Anglia	460*

Flexible pipe	39091
---------------	-------

* Suffix with colour code 01 Grey, 03 Brown, 05 Red




Clay in-line vent

Real clay tile slips provide visual integration on roof slope and 7,500mm² free area of ventilation.

Clay in-line tile ventilator	(no code)
Clay in-line tile adaptor	(no code)

Flexible pipe	39091
---------------	-------




Fibre cement slate in-line vent

Provides visual integration on roof slope and 10,500mm² free area of ventilation.

Fibre cement in-line slate ventilator (illustrated above)	(no code)
---	-----------

Flexible pipe	39091
---------------	-------


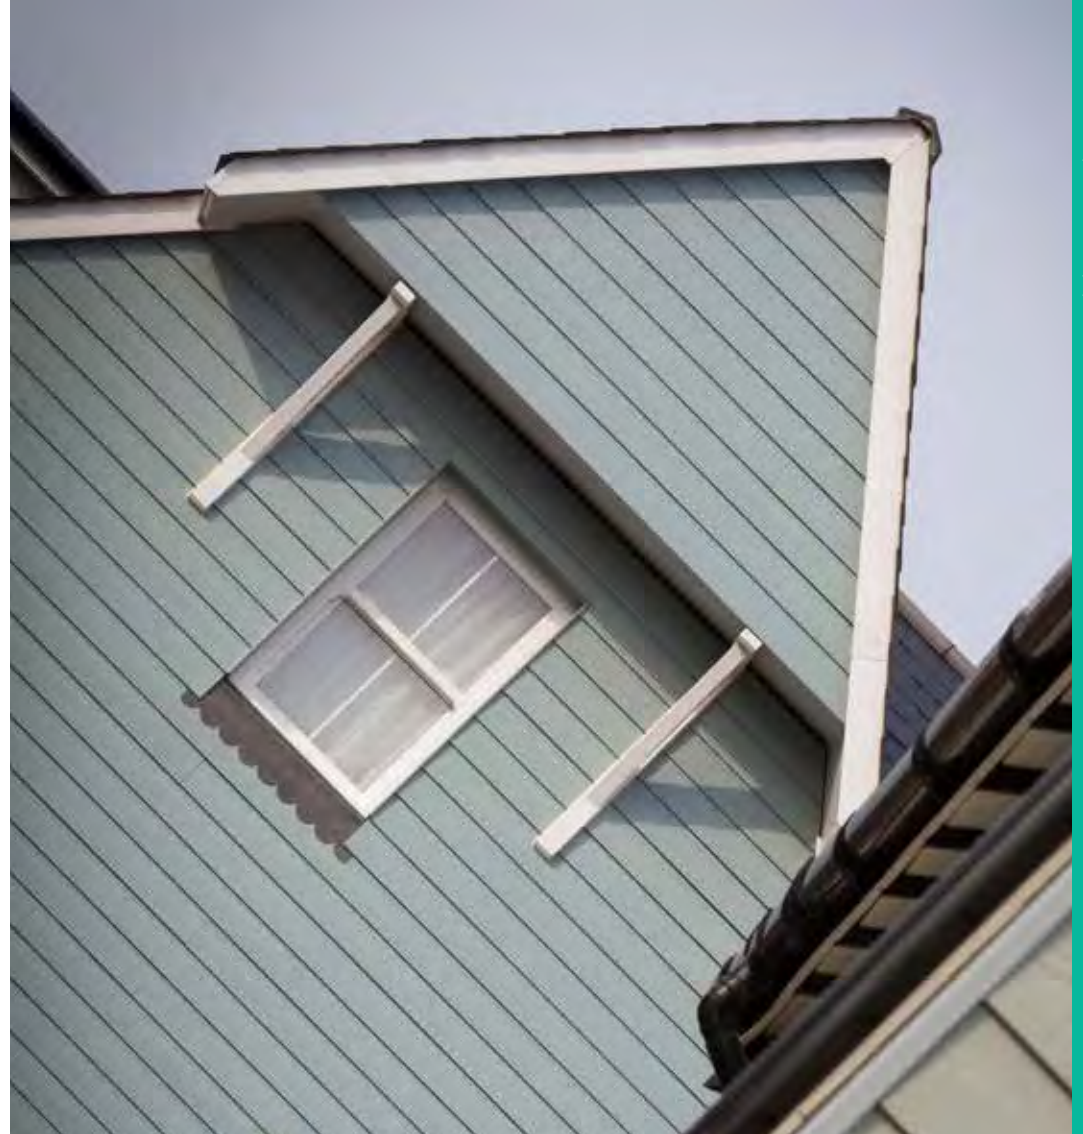


Complementary products

Cedral Lap, Rye, East Sussex



Vertigo

Avant-garde or traditional, the Vertigo range gives free rein to your creativity and brings a new dimension to design with fibre cement slates. The small, slate-like panel size perfectly adapts to the contours of the building and provides a second, protective skin which enables visual and performance continuity between roof and facade, creating a complete and beautiful building envelope.

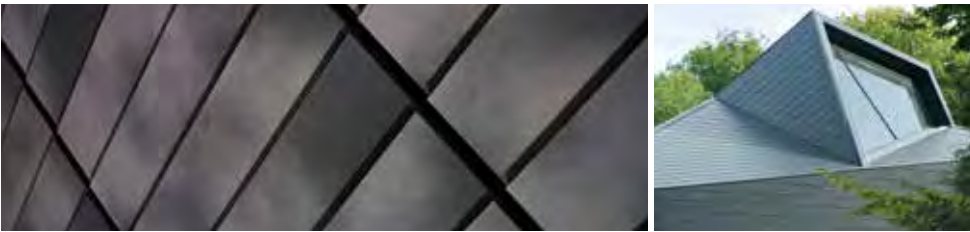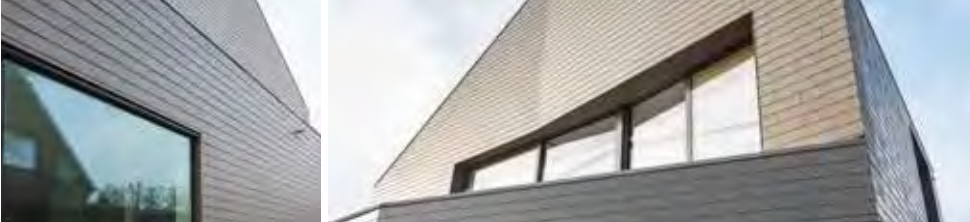

Colours and systems

For new build as well as renovation work, the Vertigo range of fibre cement slates offers an excellent aesthetic and protective solution. Existing buildings with irregularities in walls can be corrected (using brackets) at the same time as being radically embellished and given real added value.

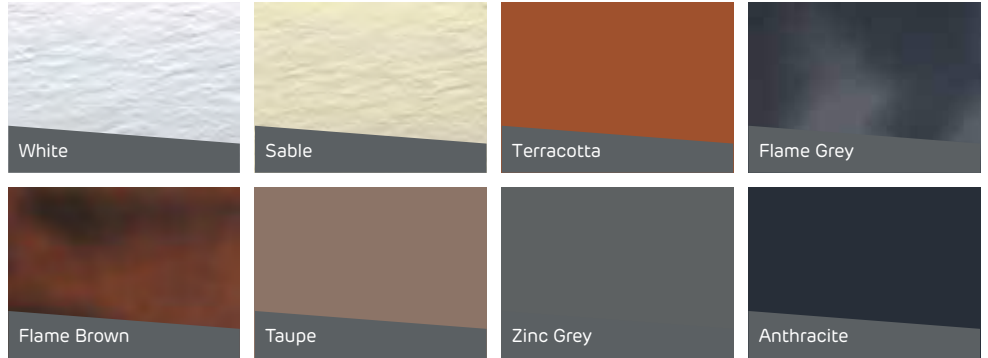

Traditional

Natural slate appearance with slate hooks.



No drilling



Broken bond

Staggered panels giving close boarded effect.



Pre-holed for broken bond installation



Panel

Regular bond panels giving geometric precision.



Pre-holed for regular bond installation


Profiled sheeting

We are the only manufacturer of fibre cement within the UK. We have been producing profiled sheeting for over 90 years and offer a wide range of corrosion-resistant and low maintenance systems across a wide range of sectors: commercial, residential, educational and agricultural.



Painted colour range

Experience gained over many years has shown that the standard Marley Eternit colour range will meet the majority of design requirements in both rural and urban areas. All the colours have been chosen for their ability to harmonise with the most commonly used building materials – brick, slate, stone, concrete and timber.

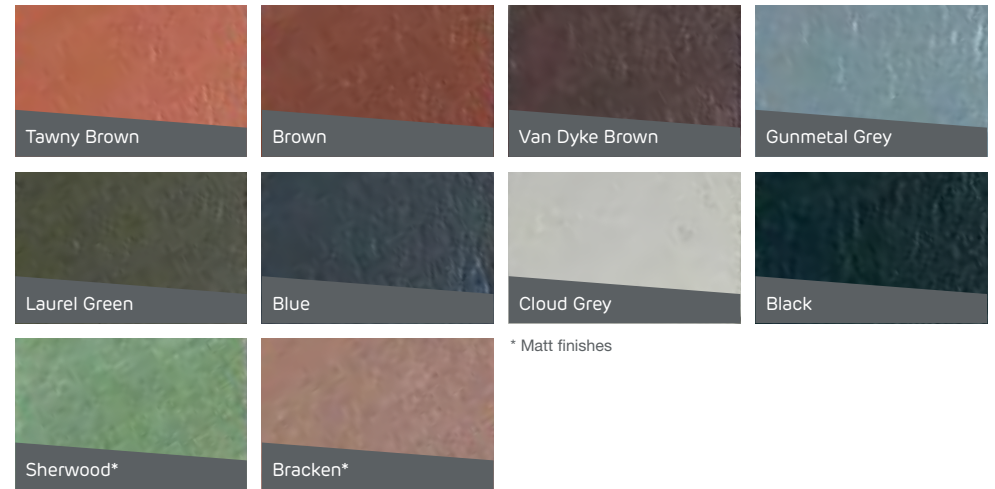


Natural Grey

Natural Grey is the standard unpainted finish for Profile 6 and Profile 3.



Farmscape Anthracite

Anthracite sheets have a pigmented surface layer. Together with subtle variations in tone inherent in any natural cementitious product, the appearance will blend with almost any landscape from the day the building is erected.



Cedral Lap

Cedral Lap is the ideal, low maintenance, alternative to traditional timber or PVCu weatherboarding. Cedral is designed so the planks overlap to create a traditional clapperboard aesthetic.

* Available as a complete system solution with complementary trims, soffit and fascia boards.



Cedral Lap colour range

All painted colours are available in a smooth finish (subject to extended lead times).

Earth tones	Forest tones	Mineral tones	Ocean tones
 C03 Grey Brown*	 C07 Cream White*	 C01 White*	 C06 Grey Green
 C14 Atlas Brown*	 C02 Beige	 C51 Silver Grey	 C10 Blue Grey
 C55 Taupe	 C08 Sand Yellow	 C05 Grey*	 C62 Violet Blue
 C61 Burnt Red	 C57 Sage Green	 C52 Pearl	 C15 Dark Grey
 C104 Light Oak**	 C60 Forest Grey	 C54 Pewter*	 C18 Slate Grey*
 C105 Dark Oak**	 C04 Dark Brown*	 C50 Black*	


* Complementary Cedral Board available in these colours

** Woodstain finish

Cedral Click






















Cedral Click* is the UK's first and only fibre cement flush fitting tongue and groove cladding board. With the same performance benefits as traditional Cedral Lap, Cedral Click planks are fitted together creating a striking modern and contemporary facade.

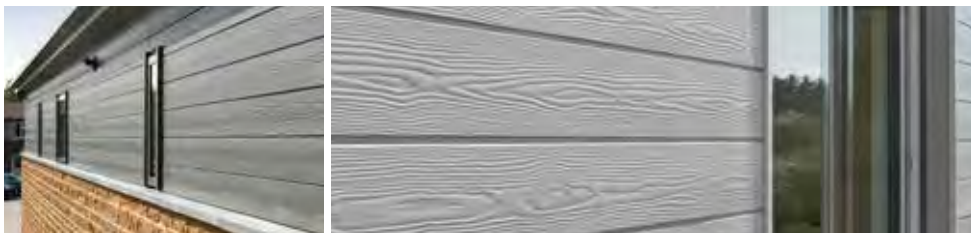* Available as a complete system solution with complementary trims, soffit and fascia boards.



Cedral Click colour range

All painted colours are available in a smooth finish (subject to extended lead times).

Earth tones	Forest tones	Mineral tones	Ocean tones
 C03 Grey Brown*	 C07 Cream White*	 C01 White*	 C06 Grey Green
 C14 Atlas Brown*	 C02 Beige	 C51 Silver Grey	 C10 Blue Grey
 C55 Taupe	 C08 Sand Yellow	 C05 Grey*	 C62 Violet Blue
 C61 Burnt Red	 C57 Sage Green	 C52 Pearl	 C15 Dark Grey
	 C60 Forest Grey	 C54 Pewter*	 C18 Slate Grey*
	 C04 Dark Brown*	 C50 Black*	

* Complementary Cedral Board available in these colours

This publication is based on the latest data available at the time of printing. Due to product changes, improvements and other factors, the Company reserves the right to change or withdraw information contained herein without prior notice. For specific applications users should refer to the Technical Advisory Service and relevant Standards and Codes of Practice for guidance. The photography shown in the document should not necessarily be taken as recommendations of good practice. The printing process restricts the exact representation of colours. For true colour reference, please request product samples.

Call 01283 722588
Email info@marleyeternit.co.uk
Or visit www.marleyeternit.co.uk



Marley Eternit Lichfield Road Branston Burton upon Trent DE14 3HD



an **etex** company